

BRACE and CROSS CLAMPS

Steel Brace Clamp - 3 (3 way)

Part No.	Size		Pipe Size
	X	Y	I.P.S.
G3	G	G	¾" x ¾"
K3	K	K	1" x 1"
L3	L	L	1½" x 1½"
KG3	K	G	1" x ¾"
LG3	L	G	1½" x ¾"
LK3	L	K	1½" x 1"
MK3	M	K	1½" x 1"
GK3	G	K	¾" x 1"




For bracing, supporting or suspending uprights, headers, suspensions or braces.

Made in two halves that clamp around pipe or tubing.

Bolts and non-slip nuts are furnished.

Steel Cross Brace Clamp - X-S (4 way)

Part No.	Size	Pipe Size
		I.P.S.
GGX-S	G x G	¾" x ¾"
KKX-S	K x K	1" x 1"
LLX-S	L x L	1½" x 1½"
GKX-S	G x K	¾" x 1"
GLX-S	G x L	¾" x 1½"
KLX-S	K x L	1" x 1½"
MLX-S	M x L	1½" x 1½"

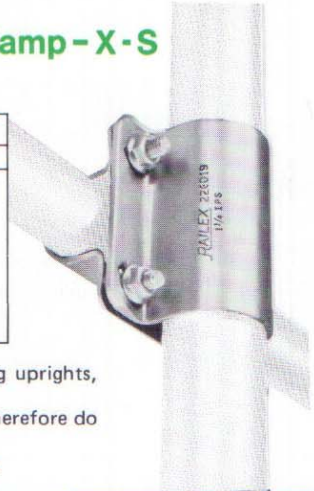

For bracing, supporting or suspending uprights, headers, suspensions or braces.

Both pipes go straight through and therefore do not have to be cut at clamp.

Bolts and non-slip nuts are furnished.

Malleable Style Cross Brace Clamp - X-M

Part No.	Size		Pipe Size
	X	Y	I.P.S.
GGX-M	G	G	¾" x ¾"
KGX-M	K	G	1" x ¾"
KKX-M	K	K	1" x 1"
LLX-M	L	L	1½" x 1½"



For bracing, supporting or suspending uprights, headers, suspensions or braces.

Made in two halves that clamp around pipe or tubing.

Bolts and non-slip nuts are furnished.

Malleable iron or steel construction with a zinc plated finish.

Lines intersect. "X" goes straight through. "Y" is cut.

U Bolt & Plate - U-P

Part No.	Size	Pipe Size
		I.P.S.
GGU-P	G x G	¾" x ¾"
KKU-P	K x K	1" x 1"
LLU-P	L x L	1½" x 1½"
KGU-P	K x G	1" x ¾"
KLU-P	L x K	1½" x 1"




For bracing uprights to headers.

Not to be used for suspending.

5

2 UBPO

Plate Only
For U Bolt.



Taper - TA



For bridging between new KT Rail Systems and early G or GT Rail Systems.

Specify rail size.

Inserts -



For connecting rails and headers internally.


Specify Size.

Sizes: G GT K KT L LT-14ga. LT-12ga.

Nipples - NI

Pre-cut for suspensions.

Size: GT x 6"



Rail End Stop - RE

Specify Size.

Sizes: G GT K KT

Prevents trolleys and hangers from moving off end of rail.

